

+1-2862

UNCLASSIFIED

4647 P. 11

ADDC TECHNICAL REPORT 52-134

~~RESTRICTED~~

Classification corrected in accordance with
Executive Order 12958 dated 8 November 2001
Lois L. Finley 11/1/54
Document Service Center
Armed Services Tech. Info. Agency

DO NOT DESTROY
TECH. DATA CENTER
COMMUNICATION
100010

127151

EVALUATION OF INTERFERENCE BLANKER MX-1077(XA)/U

RAYMOND R. HOLBERGER
HERBERT M. BARTMAN

COMMUNICATION AND NAVIGATION LABORATORY

JUNE 1952

NOV 25 1952

WRIGHT AIR DEVELOPMENT CENTER

20011016172

~~RESTRICTED~~
UNCLASSIFIED

UNCLASSIFIED

RESTRICTED

NOTICES

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

The information furnished herewith is made available for study upon the understanding that the Government's proprietary interests in and relating thereto shall not be impaired. It is desired that the Office of the Judge Advocate (WCJ), Wright Air Development Center, Wright-Patterson AFB, Dayton, Ohio, be promptly notified of any apparent conflict between the Government's proprietary interests and those of others.

The U.S. Government is absolved from any litigation which may ensue from the contractor's infringing on the foreign patent rights which may be involved.

This document contains information affecting the National Defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Sections 793 and 794. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

UNCLASSIFIED

RESTRICTED

UNCLASSIFIED
RESTRICTED

WADC TECHNICAL REPORT 52-134

SECRET ON

EVALUATION OF INTERFERENCE BLANKER MX-1077(XA)/U

Raymond R. Holberger

Herbert M. Bartman

Communication and Navigation Laboratory

June 1952

RDO NO. R-112-28

Wright Air Development Center
Air Research and Development Command
United States Air Force
Wright-Patterson Air Force Base, Ohio

UNCLASSIFIED
RESTRICTED

UNCLASSIFIED

FOREWORD

The USAF activity discussed in this report has been conducted by the Communication and Navigation Laboratory, Weapons Components Division, Wright Air Development Center, under RDO No. R-112-28, "Flight Research on Atmospheric Electricity and Development of Means to Reduce Precipitation Static." The tests were conducted on Interference Blanker MX-1077(XA)/U, Item No. 1, Contract No. AF 33(038)-11215. The contractor is Polarad Electronics Corporation, Brooklyn, N. Y. The Project Engineer, Mr. Howard C. Storck, was assisted by Mr. Raymond R. Holberger and Mr. Herbert M. Bartman. Cooperation was furnished by the staff of the contractor.

UNCLASSIFIED

UNCLASSIFIED

ABSTRACT

The testing of Interference Blanker MX-1077(XA)/U under laboratory conditions is described. Performance tests were made in the High Voltage Laboratory, Communication and Navigation Laboratory, Weapons Components Division, Wright Air Development Center. Tests were conducted under ground corona conditions, using the million-volt generator in the High Voltage Laboratory. Single sweep oscillographic photographs of blanker and blanking pulse output are shown. It was concluded that the blanker, as submitted, did not meet specification requirements and that further development work must be performed.

The security classification of the title of this report is UNCLASSIFIED.

PUBLICATION REVIEW

This report has been reviewed and is approved.

FOR THE COMMANDING GENERAL:

W. H. Congdon
for DANIEL B. WHITE WILLIAM H. CONGDON
Colonel, USAF Colonel, USAF
Chief, Weapons Components Division

UNCLASSIFIED

RESTRICTED

TABLE OF CONTENTS

	PAGE
SECTION I FACTUAL DATA	1
SECTION II CONCLUSION	2
APPENDIX A VIDEO CHANNEL	4
APPENDIX B PULSE CHANNEL	7
APPENDIX C COINCIDENCE CHANNEL	13
APPENDIX D OVER-ALL PERFORMANCE.	24
APPENDIX E MISCELLANEOUS	29
BIBLIOGRAPHY	30

LIST OF ILLUSTRATIONS

Figure

1.	Block Diagram of MX-1077(XA)/U	vi
2.	Frequency Response Curve	3
3.	Signal Channel Input and Output Waveforms.	4
4.	Table of Pulse Characteristics	5
5.	Diagram of High Voltage Test Setup	6
6.	Photographs of Corona Pulses and Resulting Blanking Pulses	7
7.	Photographs of Differentiated Square Wave and Resulting Blanking Pulses	9
8.	Schematic of Coupling Network for Pulse Generators	10
9.	Photographs of Close Spaced Pulses and Resulting Blanking Pulses .	11
10.	Simplified Schematic of Coincidence Stage.	14
11.	Sketch of Wave Shapes of Blanked Output	15
12.	Decoupling Schemes	16
13.	Photographs of Wave Shapes of Blanked Output	17
14.	Sketch of Blanked Output With No Signal Present.	18
15.	Ride-through During Blank.	19
16.	Schematic of Battery and Bleeder Methods of Determining Crystal Feed Through.	20
17.	Photographs of Random Pulse Blanking, 100 Microsecond Sweep. . . .	21
18.	Photographs of Random Pulse Blanking, 25 Microsecond Sweep	22
19.	Block Diagram of Performance Test Setup.	23
20.	Curve of Minimum Readable Signal Versus Corona Current at 245 KC..	25
21.	Curve of Minimum Readable Signal Versus Frequency at 50 Microamps of Corona Current	26
22.	Curves of Noise Level, in Decibels, Versus Corona Current at 245 KC and 8 MC	27
23.	Curve of Residual Noise Level Versus Corona Current.	28
24.	Table of Average Corona Pulses Per Second Versus Corona Current. .	29

RESTRICTED

INTRODUCTION

The need for the development of circuitry aimed at reducing the effects of precipitation static is indicated by the fact that radio communication and navigation systems are severely limited in range and dependability by a type of interference caused by electrostatic discharges from metallic and insulating surfaces of aircraft in flight. The most frequent cause of electrostatic charging is the passage of the aircraft through precipitation such as snow, ice, sleet, or rain. Thus the operational and tactical use of the aircraft is hampered by the decreased effectiveness and frequent failure of airborne electronic equipment and the systems at a time when they are most needed. The objective of the contract was to develop practical circuitry, and blanker equipment, designed to eliminate or greatly reduce the effect of impulsive noise incident upon the antenna prior to any signal reaching the tuned circuits of the associated electronic equipment. This was to be accomplished by blanking out the noise pulses without generating further blanking or switching transients. The major difficulties to be overcome, in addition to weight and size difficulties, were those of providing for the least loss of intelligence signal per elimination of each noise pulse; preservation of the received signal strength within the circuits without undue cross modulation difficulties while maintaining broadband reception; and especially that of generating the least additional intracircuit noise, including that of switching transients.

Original blanker circuits were developed at Lightning and Transients Research Institute under Contract No. N6ori-230, Task Order No. 1, Navy Bureau of Aeronautics. On 14 March 1949 Contract No. AF 33(038)-11215 was let to Polarad Electronics Corporation, Brooklyn, N. Y., under authority of Air Force Regulation 100-16, Communication Radio Interference Reduction.

Delivery of Item No. 1, Interference Blanker MX-1077(XA)/U (Figure 1), was made by Polarad Electronics Corporation 19 May 1951, for the purpose of performance test evaluation. The body of this report contains and integrates the results of the evaluation tests.

RESTRICTED

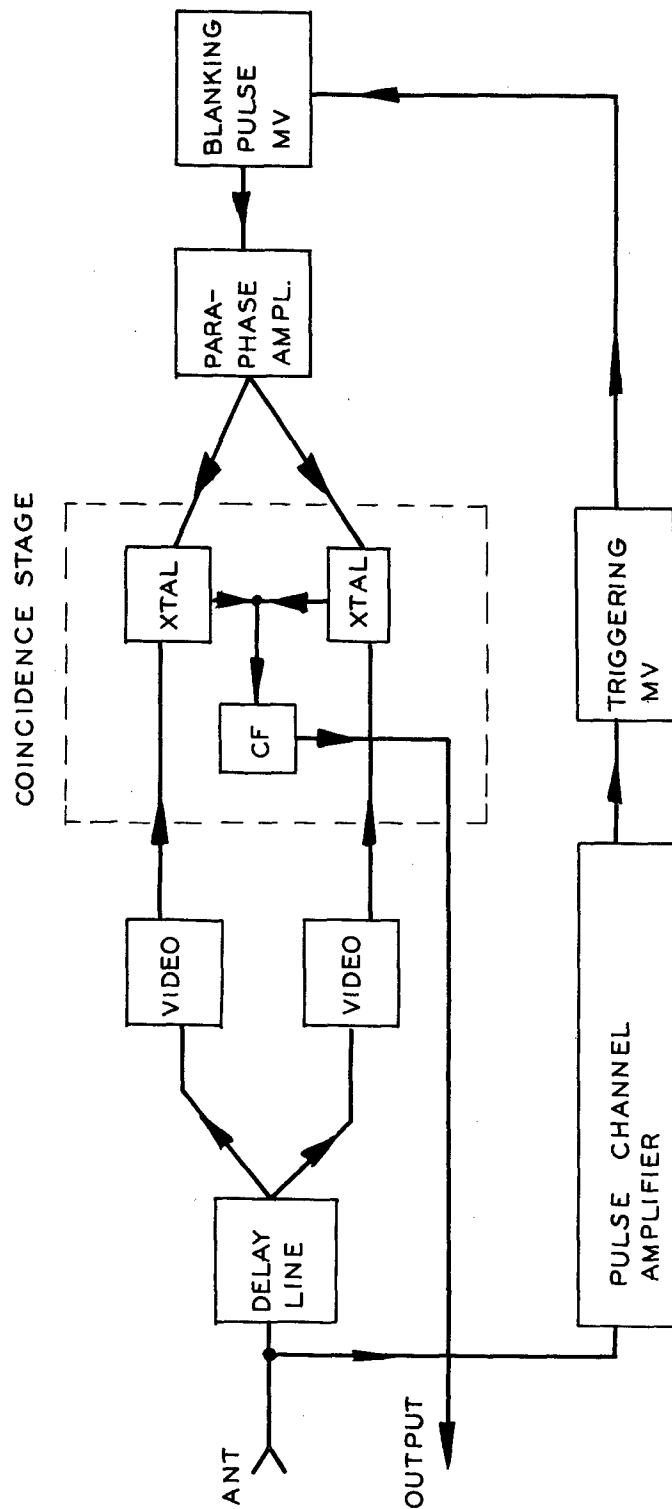


FIG. 1

BLOCK DIAGRAM OF MX 1077 (XA)/U INTERFERENCE BLANKER

RESTRICTED

RESTRICTED

SECTION I

FACTUAL DATA

The following, in abstracted form, lists data presented in attached appendices:

Video Channel: Data presented in Appendix A. The frequency response of the video channel does not meet specifications as outlined in Paragraph 3.3.6.1 of Exhibit No. MCREE-685. The transient response appears to be satisfactory according to the five megacycle bandwidth of the test oscilloscope used.

Pulse Channel: Data presented in Appendix B. The blanking pulse generator is included in the pulse channel. The most serious defect of the pulse channel is that the blanking pulse narrows considerably when the multivibrators are triggered in rapid succession. This permits a portion of the interfering pulse, when properly delayed, to extend beyond the blanking interval created by it, and is thus passed into the receiver. At full sensitivity, the blanking pulse generator begins to count down at somewhat over one million pulses per second (constant repetition rate conditions); however, the pulses narrow considerably before approaching count-down conditions. The width of the blanking pulse is not automatically extended upon arrival of following triggering pulses before the completion of the blanking pulse. The latter condition is specified in Paragraph 3.3.8.4 of Exhibit No. MCREE-685.

Coincidence Channel: Data presented in Appendix C. At conditions of constant repetition rate and optimum balance the minimum amplitude of switching transients (residuals) are of a magnitude of approximately eight millivolts. However, under the random repetition rate conditions of corona input the residuals at the output of the blanker were observed to be of magnitudes approaching 40 to 50 millivolts. It was not possible to operate the blanker with the dust cover on after approximately an hour of use because heating caused the balance conditions to drift beyond limits. Considerable overshoot was present following the blanking pulse, causing apparent blanking axis shift. Feed-through, due to the use of crystal diodes in the coincidence channel, was also detrimental to the blanking action.

Over-all Performance: Data presented in Appendix D. The over-all performance of the model blanker was checked at several frequencies from 245 kilocycles to 8 megacycles and at corona currents up to 100 microamperes. The measurement of improvement ratios in decibels appears to have little value unless combined with the measurement of minimum usable signal. The minimum usable signal ranges from 950 microvolts at 245 kilocycles and 100 microamperes of corona current to 180 microvolts at 8 megacycles for the same corona current. Measurement of noise due to residuals alone gave values up to 35 decibels above the ambient noise level. This leaves much to be desired in the light of the present state of the art.

Miscellaneous Defects: Data presented in Appendix E. The blanker, as designed, does not stand level on the shock mounts provided. Microphonic conditions in the model were such as to preclude possibility of flight tests. Cooling provisions were inadequate. Physical design of the model is such that it cannot be readily serviced.

RESTRICTED

SECTION II

CONCLUSIONS

It is concluded that Interference Blanker MX-1077(XA)/U, Item No. 1 of Contract No. AF 33(038)-11215, does not fulfill the requirements of that contract and is therefore not acceptable. Due to the deficiencies listed below and described in detail in the body of the report, the blanker would perform no useful purpose. The deficiencies apparent in the design of the blanker are:

1. That undesirable background noise is due not only to residual transients, but also to the fact that the blanking pulse generating circuits produce narrower blanking pulses when two or more closely following noise pulses are received at the antenna allowing portions of the noise pulses to reach the receiver.

2. That the blanking pulses are followed by overshoot of such amplitude and duration as to cause not only extensive variation of the blanking axis with the result that, in the majority of cases, the noise pulses over-ride the blank and appears in the output, but also cause high speed transients which are far more detrimental to reception.

3. That the defective action is attributable, to some extent, to signal and noise feed-through due to the characteristics of the crystal diode coincidence stage.


4. That the physical design of the blanker results in microphonics of such extent that the model, or copies of it, could not be flown because of that condition alone.

5. That heat generated within the blanker precludes the possibility of operating the blanker in assembled form.

The measurement of improvement ratios appears to have little value unless combined with measurement of minimum usable signal.


The experimental blanker was not tested under shock, vibration, heat, cold, humidity or other condition. The defects enumerated in this report are such as to make such tests of the present model superfluous.

RESTRICTED

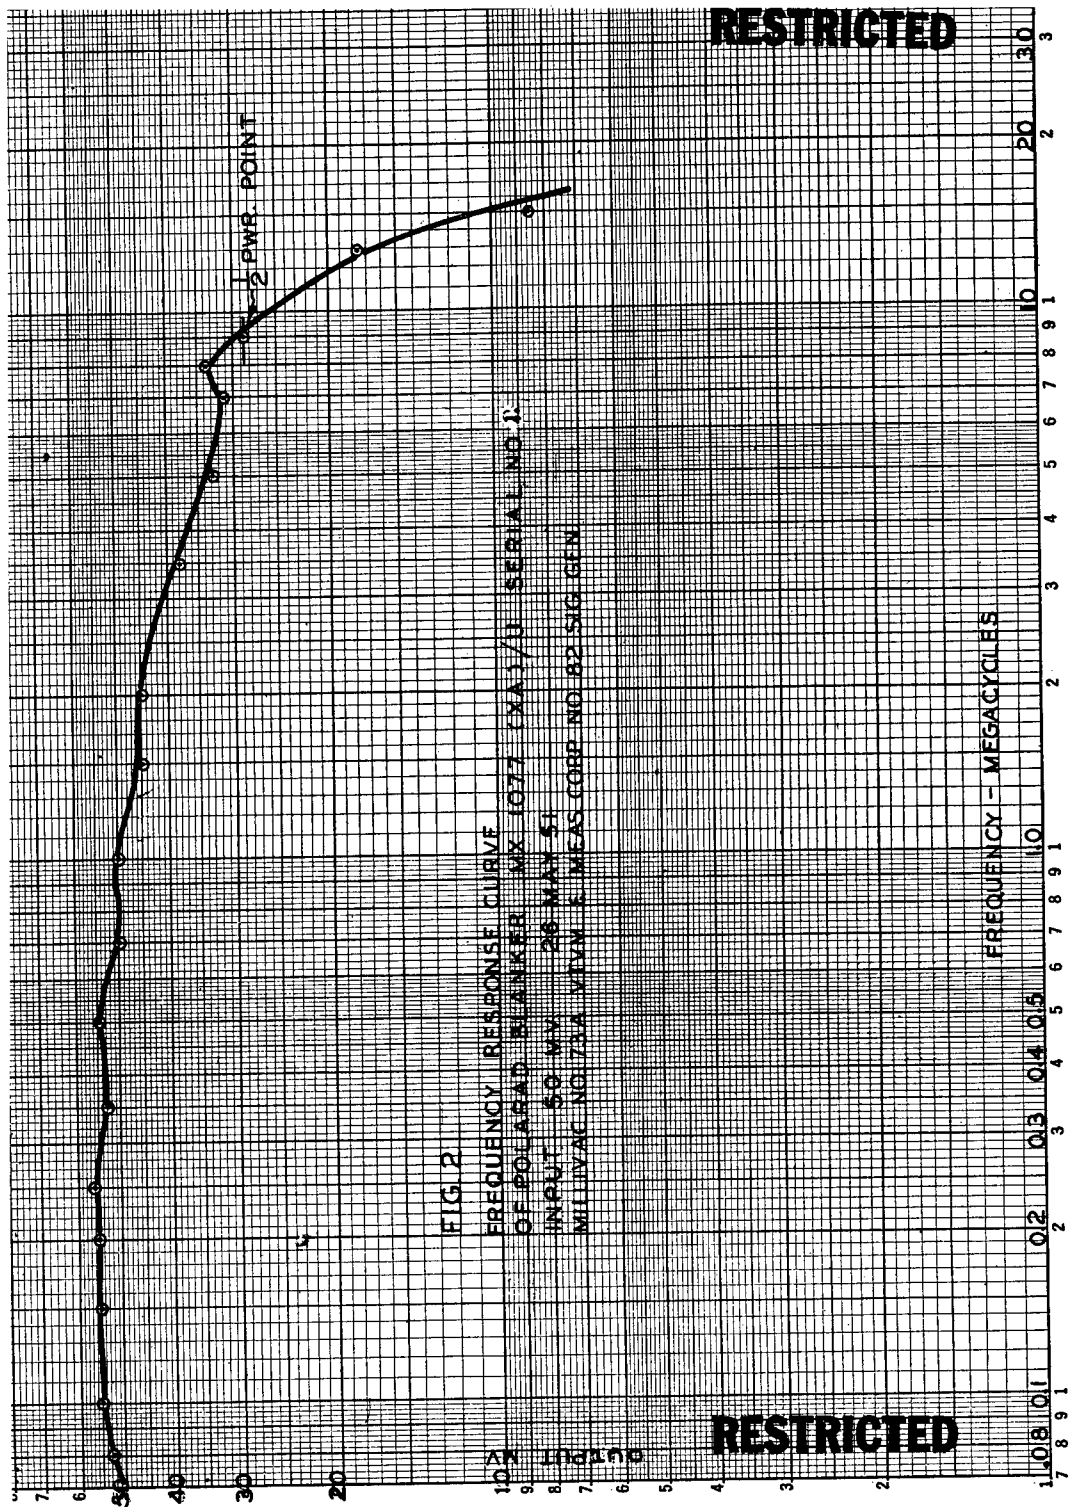

RESTRICTED

RESTRICTED

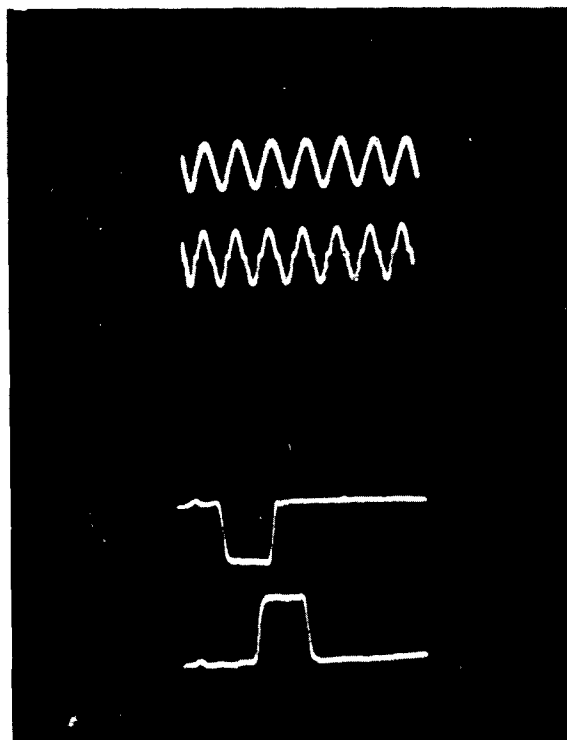

A MX-1077(XA)/U output with 500 MV peak input

B MX-1077(XA)/U output with 560 MV peak input

C Pulse input to MX-1077(XA)/U

Pulse Width = 1 μ s

Pulse Ampl = 50 mv

D Pulse output from MX-1077(XA)/U, unblanked

FIGURE 3
SIGNAL CHANNEL INPUT AND OUTPUT

APPENDIX A VIDEO CHANNEL

The frequency response of the Interference Blanker MX-1077(XA)/U was taken in a conventional manner by applying signal from a Measurements Corp. Model No. 82 Signal Generator and reading the output from the blanker on a Millivac No. 73A VTVM. The output was held constant and the signal input voltage was read. The magnitude of the signal used was 50 millivolts RMS at the input of the blanker. This voltage was large enough to give readable values on the instruments used, yet well below the limiting voltage. The gain of the channel was unity between 700 kilocycles and 1 megacycle. The -3db (half power) point fell at about 9 megacycles. The response curve is shown in Figure 2. The video channel is not acceptable since the bandwidth was specified to 20 megacycles or better in Paragraph 3.3.6.1 of Exhibit No. MCREE-685.

The video channel begins to slice at about 500 millivolts peak input and begins to limit at some point above 600 millivolts. This is well within the specifications which requires no limiting up to 200 millivolts peak input. Apparently, the parallel video stages are driven into a Class C operation with inputs about 500 millivolts peak. The output for a sinusoidal input of 560 millivolts peak is shown in Figure 3.

The delay line used is a distributed constant line manufactured by Millen Company, and has a delay of approximately one microsecond per 22 inches of length.

RESTRICTED

The length used in the blanker model produces a delay of about 0.6 microsecond.

The pulse distortion due to the delay line and signal channel circuitry was checked by photographing a test pulse at the input and output of the experimental model of the blanker using a DuMont 248A oscilloscope, a Tektronix type 121 wide band amplifier and a Polaroid Land camera. The bandwidth of the 248 scope is five megacycles and the bandwidth of the amplifier is 20 megacycles. The wave shapes are shown in Figure 3. The pulse width, rise and decay times are as follows:

	Base width	flat top width	Rise time	Decay time
Input pulse	1.1 us	0.7 us	0.1 us	0.2 us
Output pulse	1.1 us	0.7 us	0.1 us	0.2 us

Figure 4

RESTRICTED

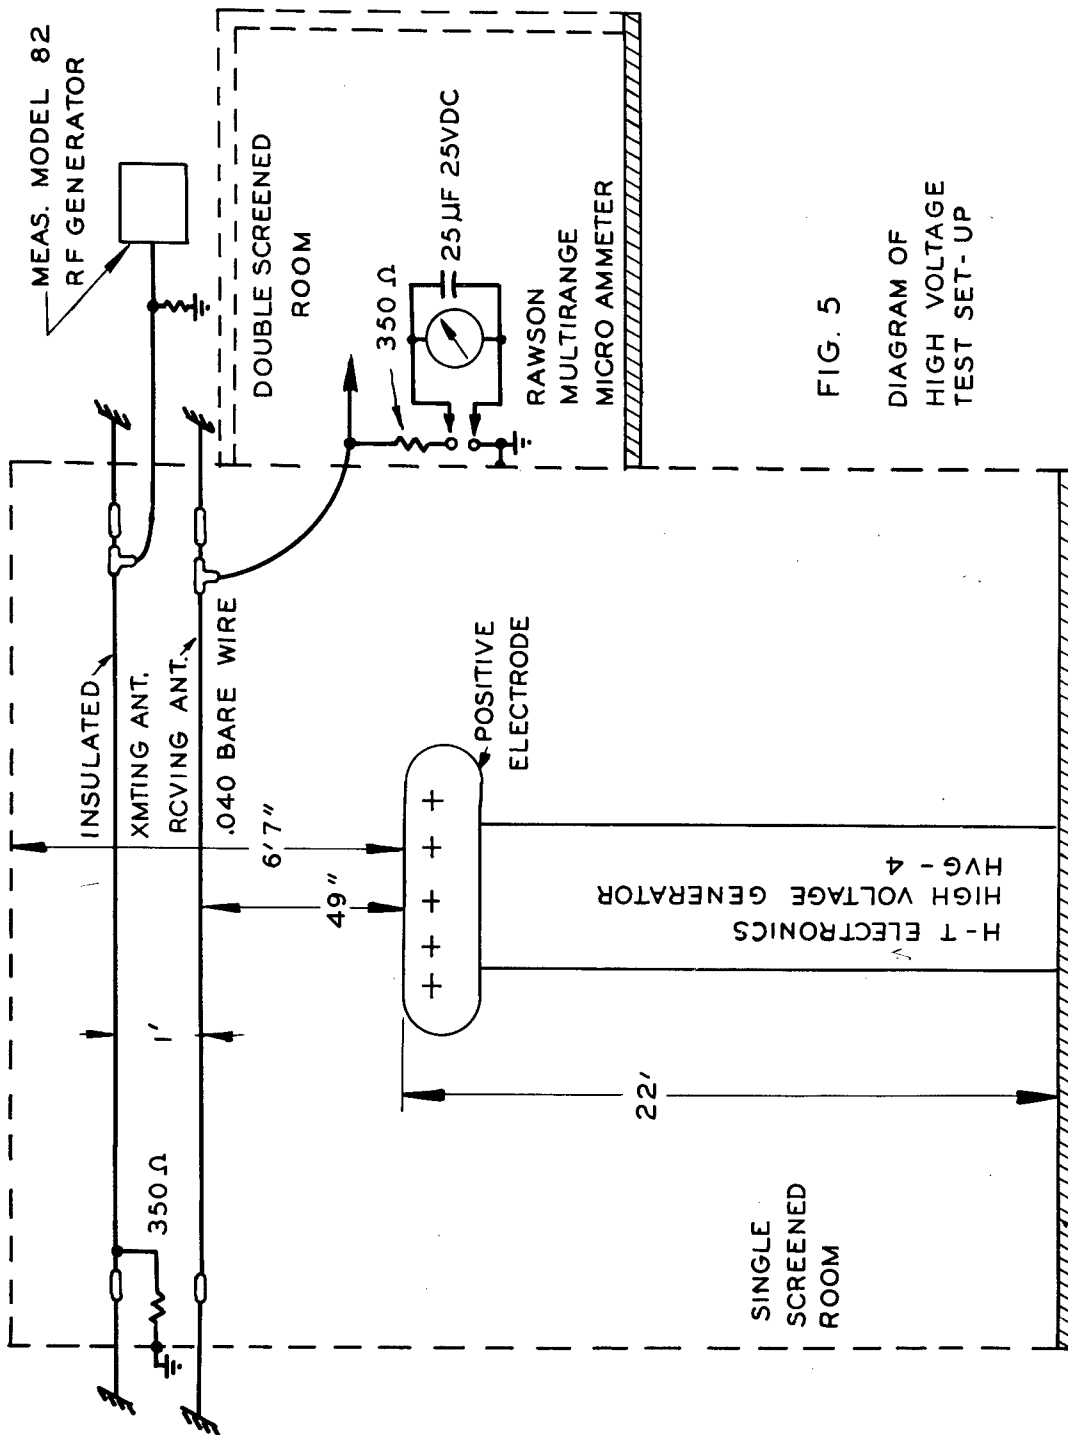


FIG. 5
DIAGRAM OF
HIGH VOLTAGE
TEST SET-UP

RESTRICTED

RESTRICTED

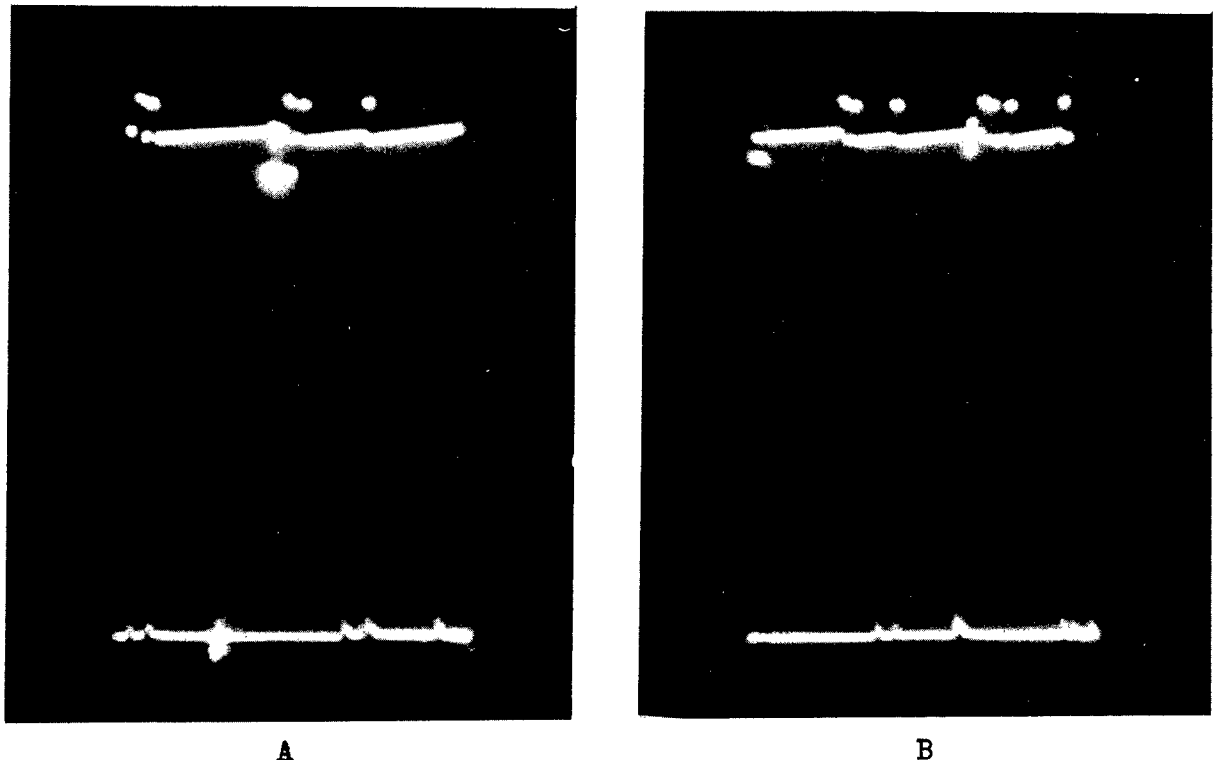


FIGURE 6
PHOTOGRAPHS OF CORONA PULSES AND RESULTING BLANKING PULSES

Simultaneous 125 us sweeps showing blanking pulses on the top traces and the causative corona pulses on the bottom traces.

APPENDIX B

PULSE CHANNEL

The pulse channel, which consists of a crystal stage arranged to give a unipolar output regardless of input pulse polarity, four stages of amplification, a triggering multivibrator and a blanking multivibrator, was tested on both continuous repetition rate and random pulses.

The random pulse source was furnished by corona drawn from a bare wire antenna erected over the 1,000,000-volt generator. The diagram of high voltage test setup is shown in Figure 5.

The tests were accomplished by observing and photographing corona pulses and blanking pulses simultaneously on the dual channel H-T Oscilloscope Model 1E. Results of the above tests are shown by the photographs of Figure 6.

RESTRICTED

RESTRICTED

Several deficiencies can be noted from the photographs. Perhaps the most serious fault is the narrowing of the blanking pulses. The effect of this pulse narrowing will be fully discussed in the paragraphs concerning the constant repetition rate pulse-pair tests.

Another defect can be noted in Figure 6A which illustrates that the blanking pulse generator did not fire for an isolated corona pulse of considerable amplitude. The MV sensitivity control was not set at a maximum; however, it can be seen from the picture in Figure 6B that the multivibrator was firing on very much smaller pulses at higher repetition rates. The seriousness of this "sleeping sickness" depends upon the frequency with which it occurs. Only a few such instances were observed, but it must be remembered that only a small percentage of the total time was sampled. This condition could not be analyzed because of the scarcity of its occurrence but is hereby reported for future reference.

Using pulses from the Colonial and the Hewlett-Packard pulse generators, the steady repetition rate performance of the pulse channel was checked. It was found that the blanking pulse generator would trigger on positive or negative pulses as small as three millivolts at a repetition rate of 5,000 pulses per second at full sensitivity. To obtain these small pulses, a differentiating circuit consisting of a 14-uufd condenser and 3,000-ohm potentiometer was connected across the output of the Colonial Pulse Generator Model No. 700. The pulse amplitude was then calibrated with an r-f signal from the Measurements Corp. Model 82 Radio Frequency Signal Generator.


The input pulse amplitude had little effect on the blanking pulse except for a shift to a point earlier in time as the input pulse amplitude is increased. This time shift reaches a maximum of about 1/2 microsecond at about 50 millivolts of input pulse, at full sensitivity. At one half sensitivity the minimum trigger voltage is about 40 millivolts, and the maximum time shift is reached at about 100 millivolts.

Input pulse width between 0.5 microseconds and 8.0 microseconds has no effect on the blanking pulse. Input pulses wider than 8.0 microseconds will cause the multivibrator to retrigger on the trailing edge of the input pulse. This is probably due to differentiation of the wide pulses within the pulse channel.

The maximum steady state repetition rate of the blanking pulse generator was determined by using the differentiated output of a Tektronix, Inc. Square Wave Generator Type 105 as the input to the Interference Blanker MX-1077(XA)/U. It was found that the multivibrators began to count down at about 1,200,000 pulses per second at full sensitivity, and at about 700,000 pulses per second at half sensitivity. Figure 7 shows that the blanking pulses narrow considerably when this repetition rate is attained. The amplitude of the triggering pulses in this case was about 12 millivolts peak. The point at which the multivibrators count down is a function of the trigger pulse amplitude and the multivibrator sensitivity control setting.

Further constant repetition rate triggering tests were made with an applied radio frequency signal. It was found that the minimum triggering voltage occurred at a frequency of about 700 kilocycles. This value, at full sensitivity, was 4.2

RESTRICTED

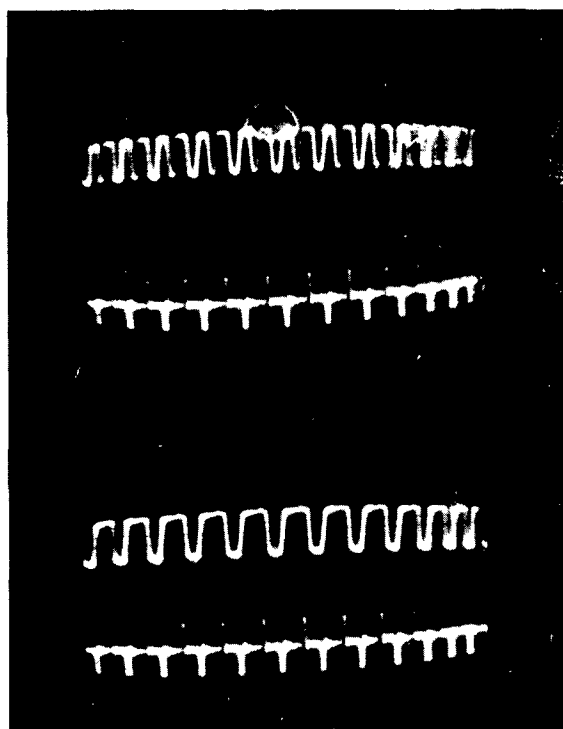

A: MV Output
Input = 1,180,000 PPS

B: MV Output
Input = 1,200,000 PPS

FIGURE 7

DIFFERENTIATED SQUARE WAVE AND RESULTING BLANKING PULSES

millivolts peak, and at half sensitivity, it was 42 millivolts peak.

Pulse Channel performance on close spaced pulses was determined by coupling the Colonial and the Hewlett-Packard Pulse Generator outputs and feeding the results to the blanker model as shown in Figure 8. In this way two pulses can be obtained having a spacing which can be varied with the pulse delay control on the Hewlett-Packard Pulse Generator.

Results of tests with the above-described input pulses are shown in Figure 9. Figure 9A shows triggering pulse-pairs and the resulting blanking pulses. Traces 3 and 4 of Figure 9A display the pulses on a 5 microsecond sweep, and it can be noted that the second blanking pulse has narrowed considerably as the interval between the pulses is decreased.

Figure 9B shows the unblanked output of the Blanker superimposed on the blanking pulse and blanked output of the Blanker for two different intervals between input pulses. The oscillations present near the second pulse of the output waveforms are due to radiation from the Hewlett-Packard Pulse Generator and should be discounted. Traces 3 and 4 show the input pulses spaced so as to give two close spaced blanking pulses. The second pulse is narrow and the effect of this narrowing is evident in the output waveform which shows that the trailing

RESTRICTED

RESTRICTED


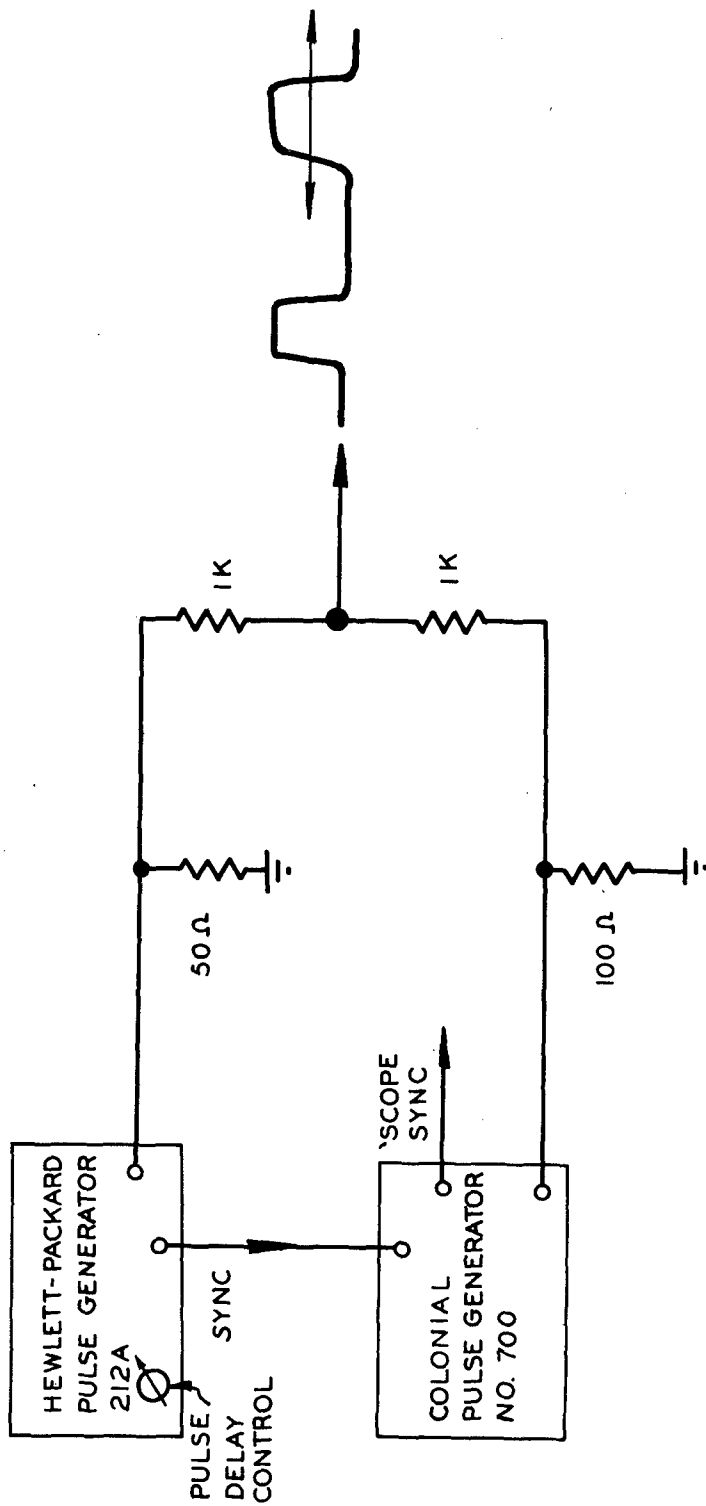



FIGURE 8
DIAGRAM OF PULSE GENERATOR COUPLING NETWORK
FOR DOUBLE PULSE OUTPUT

RESTRICTED

RESTRICTED

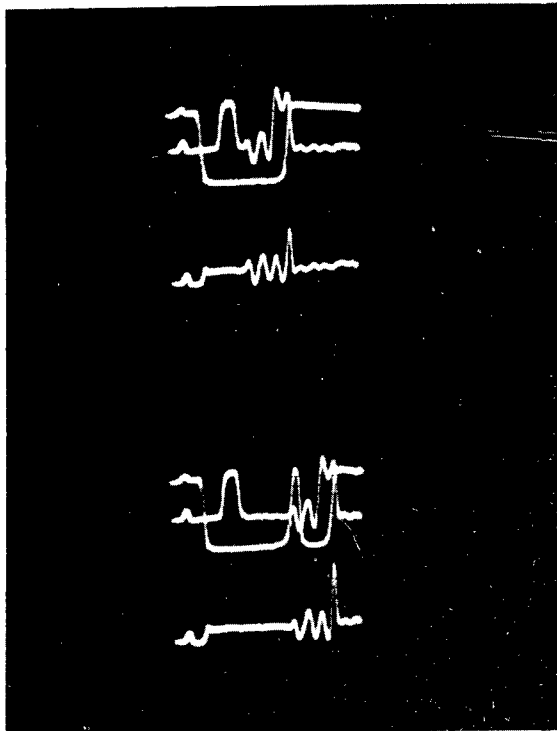

1. Unblanked Output superimposed on Blanking Pulse.
2. Blanked Output Sneak-Through.
3. Unblanked Output Superimposed on Blanking Pulse and Foreshortened 2nd B.P.
4. Blanked Output Sneak-Through.

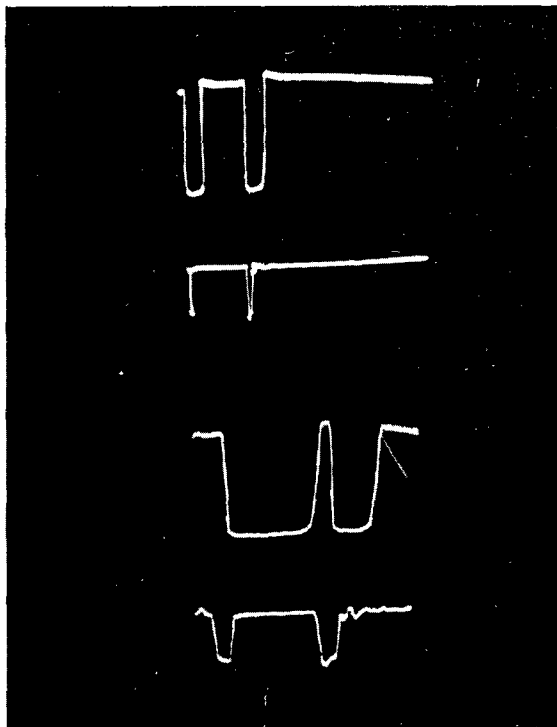

1. Completed Blanking Pulses on 25 us Sweep.
2. Trigger Pulses.
3. Close Spaced Blanking Pulses on 5 us Sweep, Showing Foreshortening.
4. Trigger Pulses for Trace 3.

A

FIGURE 9
CLOSELY SPACED PULSES AND RESULTING BLANKING PULSES

WADC TR 52-134

11

RESTRICTED

RESTRICTED

edge of the interfering pulse was left unblanked. The same result is evident in traces 1 and 2 where the input pulses are spaced so that only a single, normal width blanking pulse is generated. If the pulses had been spaced a little closer than shown on trace 1, they would both have been blanked out by the single blanking pulse. If they had been spaced a little further apart than shown on trace 3, the second blanking pulse would have been sufficiently wide to blank the second interfering pulse. It is during this small interval in time on the horizontal axis, that the blanking pulse generator is incapable of blanking out the entire pulse. This invalidates the blanking action for the given noise pulse and results in unwanted effects in receiver. Further evidence of this is given in Appendix C where the coincidence stage is discussed.

The pulse channel of Interference Blanker MX-1077(XA)/U is not acceptable since Paragraph 3.3.8.4 of Exhibit No. MCREE-685 requires that the width of the blanking pulse be automatically extended upon the arrival of other triggering pulses before the completion of any blanking pulse.

RESTRICTED

APPENDIX C

COINCIDENCE CHANNEL

The coincidence channel tested consists of circuitry as shown in Figure 10. This is a simplified schematic.

The signal and noise pulses are amplified in the paralleled amplifiers and fed in phase to the terminals A and B. When no blanking pulse is present, the signal and noise is placed on the grid of the cathode follower through the high conductivity of the IN69 crystals. However, with a blanking pulse present at terminals C and D, the noise is blanked out since the IN69 crystals are then in a condition of low conductivity so that very little or no signal and noise should appear at the grid of the cathode follower. The condition of low conductivity causes a greater signal and noise voltage drop to appear across the crystals than across the grid resistor of the cathode follower.

The above introduction sets forth the circuitry and basic requirements of the coincidence channel. Within a limited range of operation the channel is satisfactory, but the results of the tests conducted in the Communication and Navigation Laboratory indicate that much is still lacking, not alone in coincidence stage but in over-all operation of the blanker.

Observed residuals (the remnants of transient resultants of blanking action after balancing) of eight to ten millivolts resulted at best balance with an input of one half microsecond pulses at 5,000 pulses per second and approximately 200 millivolts amplitude from the Colonial Pulse Generator Model 700. An a-c pickup of approximately eight millivolts (400 and/or 800 cycles per second) occupies the blanked interval. A hump or bounce (over shoot) as shown in Figure 13, with amplitude of 35 millivolts was present after the blanked interval. This causes an increase in residuals with resulting displacement of the base line (r-f axis), thus increasing the over-all noise level of the blanker.

Figure 11 shows the resulting wave shape at the output of the blanker. This figure was sketched from the DuMont Oscilloscope Model 248A (248 scope) and Tektronix Pre-Amplifier Type 121 (pre-amp 121).

It has been found that the bounce under corona conditions can be reduced in amplitude to approximately 20 millivolts by appropriate decoupling measures such as shown in Figure 12, but the resulting residuals were still too great to meet specifications. Figure 13 shows that when two successive pulses appear within 50 to 20 microseconds of each other, the bounces are additive so as to increase the residuals to approximately twice the previous conditions when only one pulse was present.

The a-c pickup riding within the blanked interval appears to be pickup from a strong filament field and/or a ripple riding on the B+. It appears, after observing a large number of single sweep photographs taken with a dual-channel H-T Oscilloscope Model 1E, that the blanking axis could possibly follow the peaks and valleys of the a-c pick-up, producing a minor shift in the axis. This is

RESTRICTED

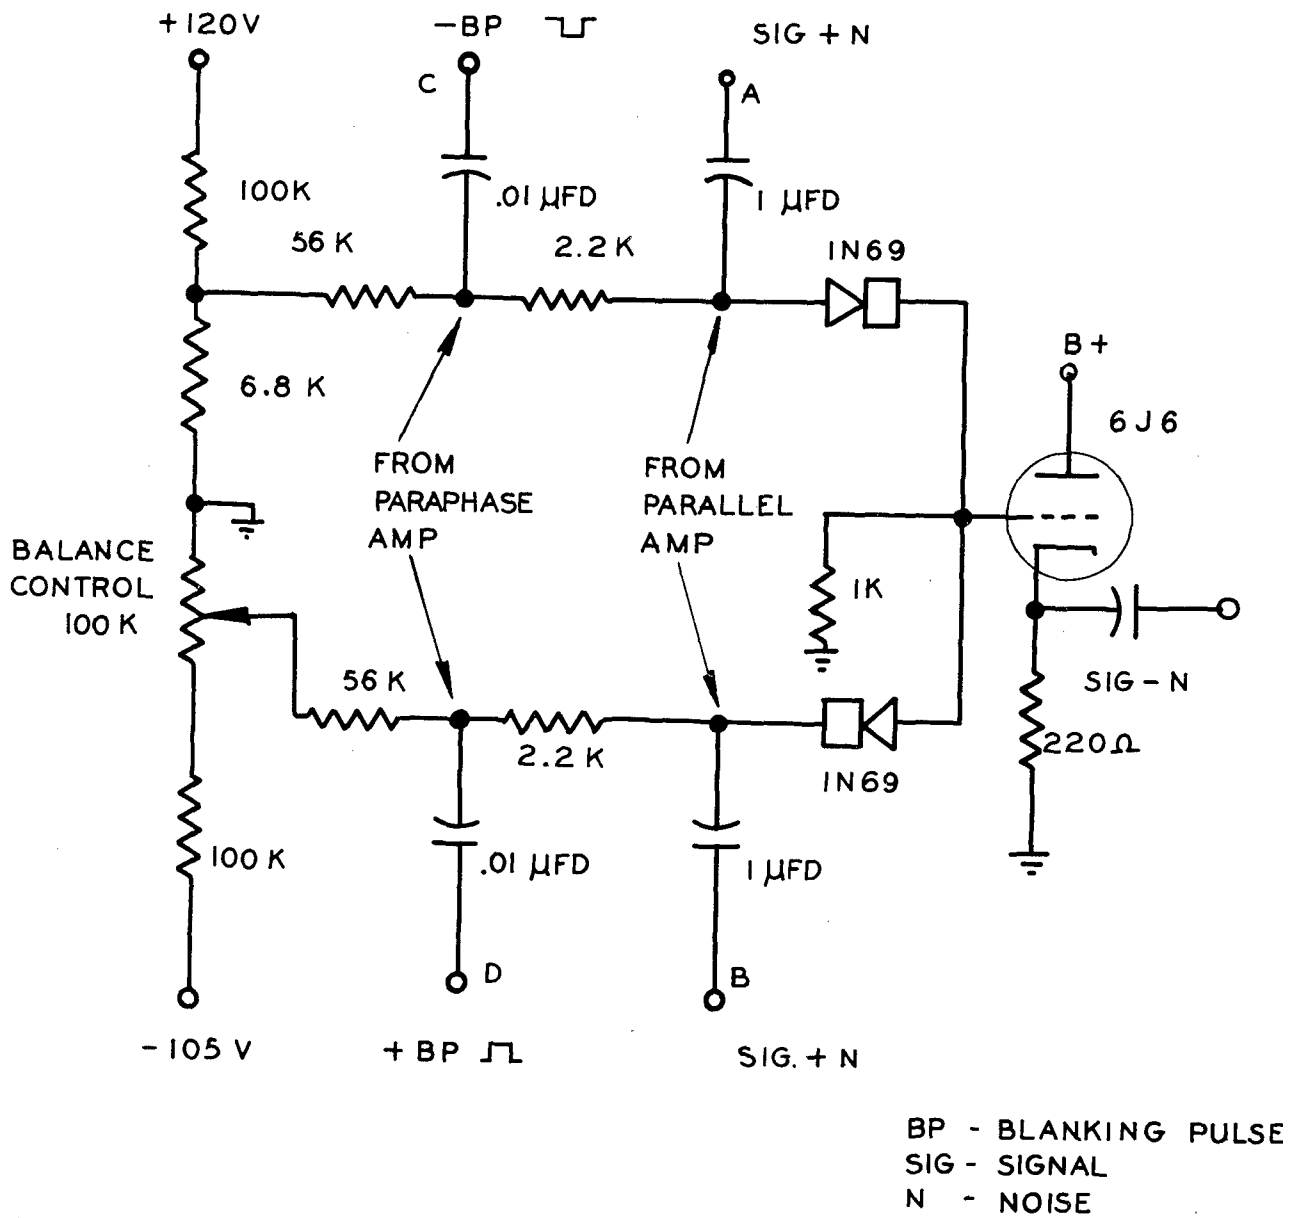


FIG. 10
 COINCIDENCE CHANNEL

RESTRICTED

RESTRICTED

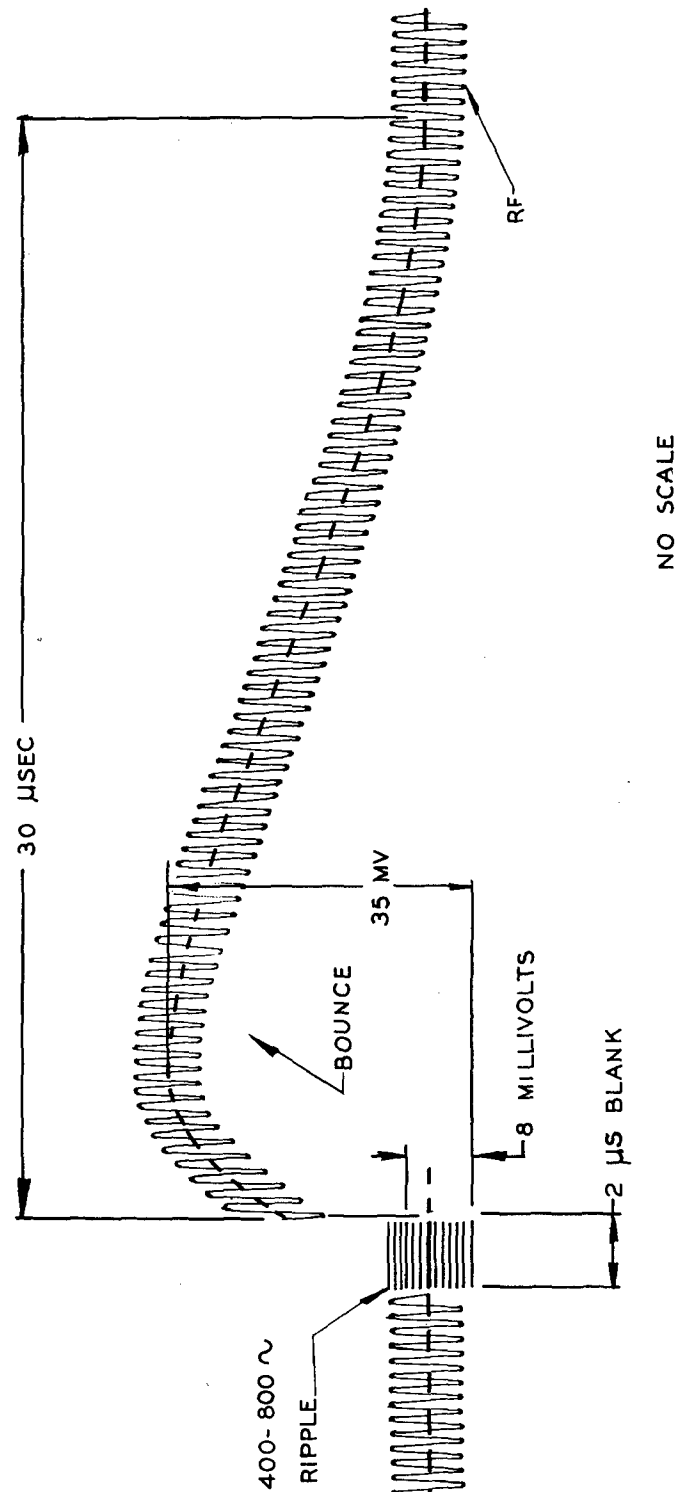


FIG. 11

SKETCH OF APPROXIMATE AMPLITUDE AND SHAPE OF BLANK AND BOUNCE

RESTRICTED

RESTRICTED

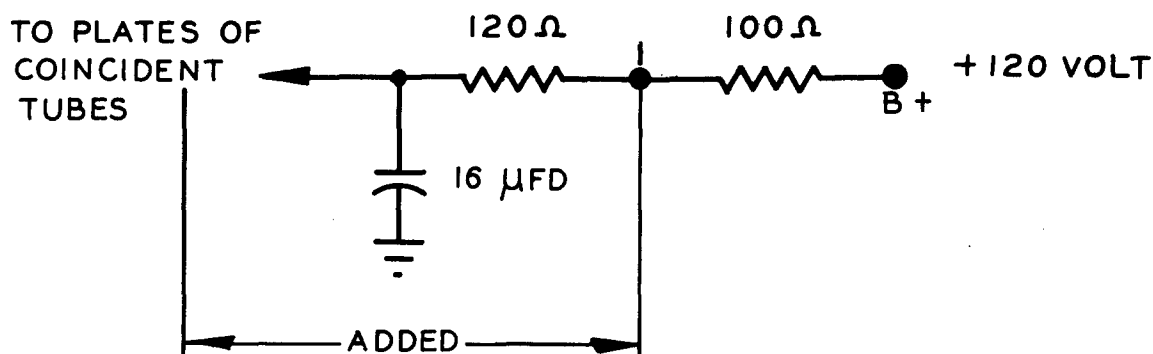


FIG. 12

POSSIBLE DECOUPLING CIRCUIT

illustrated in the sketches shown in Figure 14.

The residuals from the IN69 crystal operation may be reduced to approximately eight or ten millivolts (by balancing) under constant repetition rate conditions. The balance control is not critical. The addition of capacity to either side of the crystal circuit did not improve the balanced condition.


With the cover on, the blanker heated so badly that continuous rebalancing was necessary and balance could not be arrived at after an hour of operation.

The noise pulse blanked out was within the 200-millivolt maximum range specified. Above that amplitude at constant repetition rate to the blanker, the ride-through (that portion of the noise pulse which may appear during the blanking interval) becomes apparent. The single sweep pictures taken from the 248A scope screen bear out the fact that ride-through was present but generally less than the amplitude of the maximum residuals. See Figure 15.

A crystal feed-through check was set up wherein the crystals were cut off (placed out of conduction) by a fixed bias. This simulated a blanked condition of the coincidence circuit. A random noise (corona) source (see Figure 5) was set up and 85 microamperes of corona current were applied to the input of the blanker. The output of the blanker was applied to the input of the National Company Model NC-100 Receiver. The S-Meter readings of the receiver indicated the relative noise levels of the blanker. With no corona, the S-Meter read S3 units. At 85 microamperes of corona directly applied to the input of the receiver, the S-Meter indicated S9 plus 20db. At 85 microamperes of corona current into

RESTRICTED

RESTRICTED

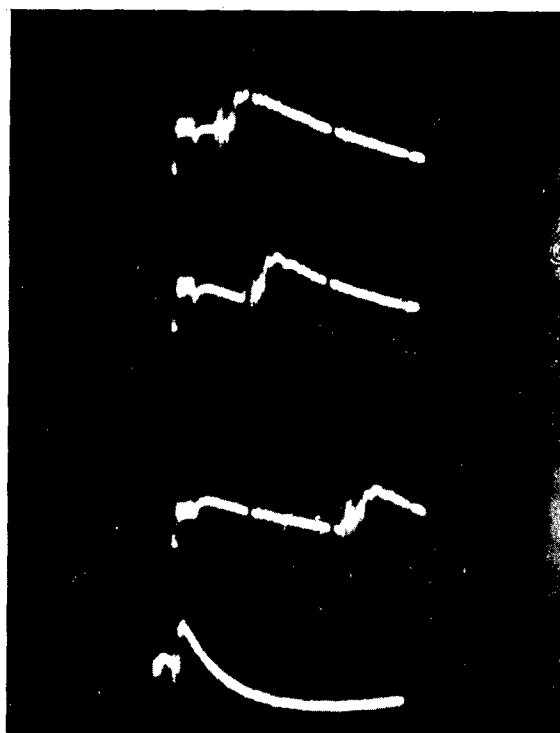

(a)

(b) Traces (a), (b), and (c)
Blanked output showing second
blank at various distance from the
first, 10 microsec. markers, 25
microsec. sweeps.

(c)

(d) Second blank is high on hump of
first blank - Humps Add
100 microsec. sweep, 10 microsec.
markers.

NOTE: Used Scope 248A full gain and
Pre-Amp 121 full gain, land
camera.

FIGURE 13

EVIDENCE OF BASE LINE SHIFT AFTER EACH BLANKED NOISE PULSE


the blanker connected to the input of the receiver (with the blanker crystals cut off as stated above) the S-Meter indicated S8 showing that there is apparently considerable feed-through. Figure 16 shows both battery and bleeder methods used in biasing the crystals.

The output of the coincidence stage is shown in Figure 17 and 18. The transients are a result of the deficiencies in the coincidence and pulse channel operation. Figure 18A illustrates the output of the blanker with apparent results of deficiencies as listed below:


1. "Ride-through" during the first blanking interval.
2. First blank extended but not sufficiently to cover second noise pulse.
3. Second blanking pulse riding on the "bounce" of the first blank.
4. The first blank riding in the trough of a bounce caused by a previous blank.

The residuals shown are approximately 20 millivolts peak.

RESTRICTED

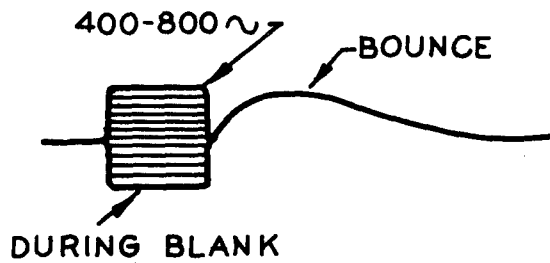

RECURRENT SWEEP
PULSE GEN. 700
5000 PULSES PER SECOND

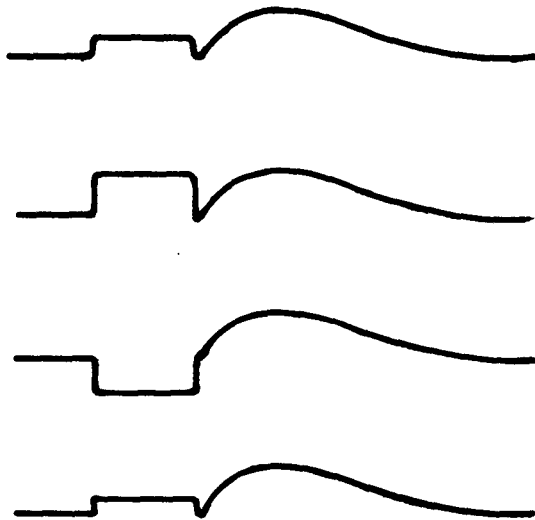


SINGLE SWEEP TRACES
AS SEEN BY THE H-T 'SCOPE

THE ABOVE SKETCHES SHOW THAT
BLANK WILL APPEAR AT VARIOUS LEVELS DEPENDING
ON THE INSTANT THE PICTURE WAS TAKEN.

FIG. 14

RESTRICTED

RESTRICTED

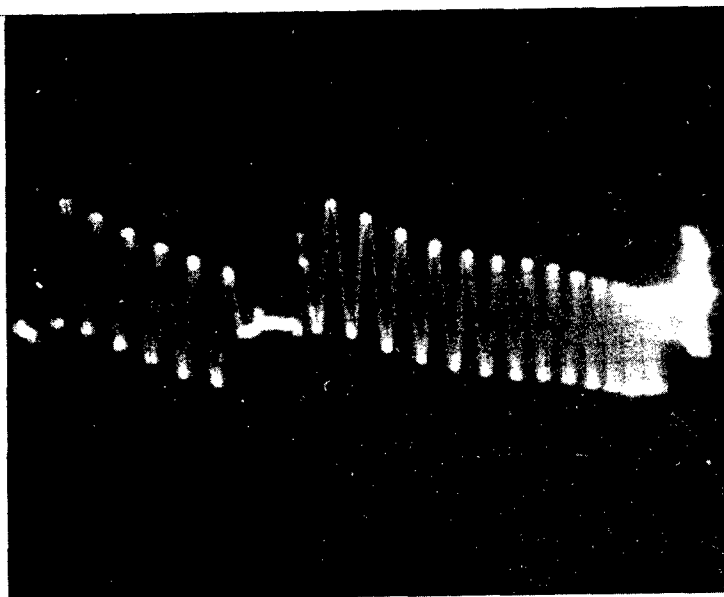

RF: 20 mv peak to peak
SWEEP: 25 Microseconds
CARRIER FREQ: 1 Megacycle

FIGURE 15


RIDE-THROUGH DURING THE BLANK

Figure 18B shows the same results as in Figure 18A except that the blanking axis is at a lower level in respect to the mean r-f level. This may be a result of blanking axis shift caused either by the a-c pickup variation as discussed previously, or by change in repetition rate of the noise source.


Figures 17A and 17B illustrate the relatively large composite residuals of magnitudes of from 40 to 50 millivolts. This decidedly shows the unsatisfactory operation of the blanker.

RESTRICTED

RESTRICTED

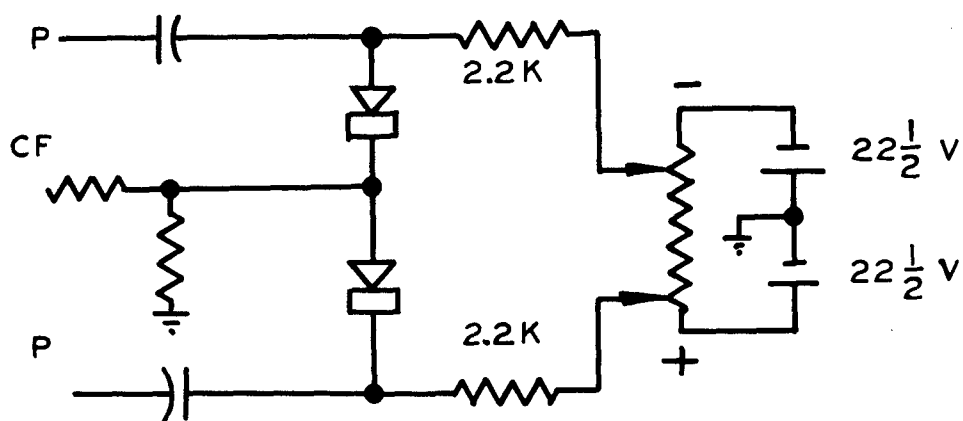

BATTERY METHOD

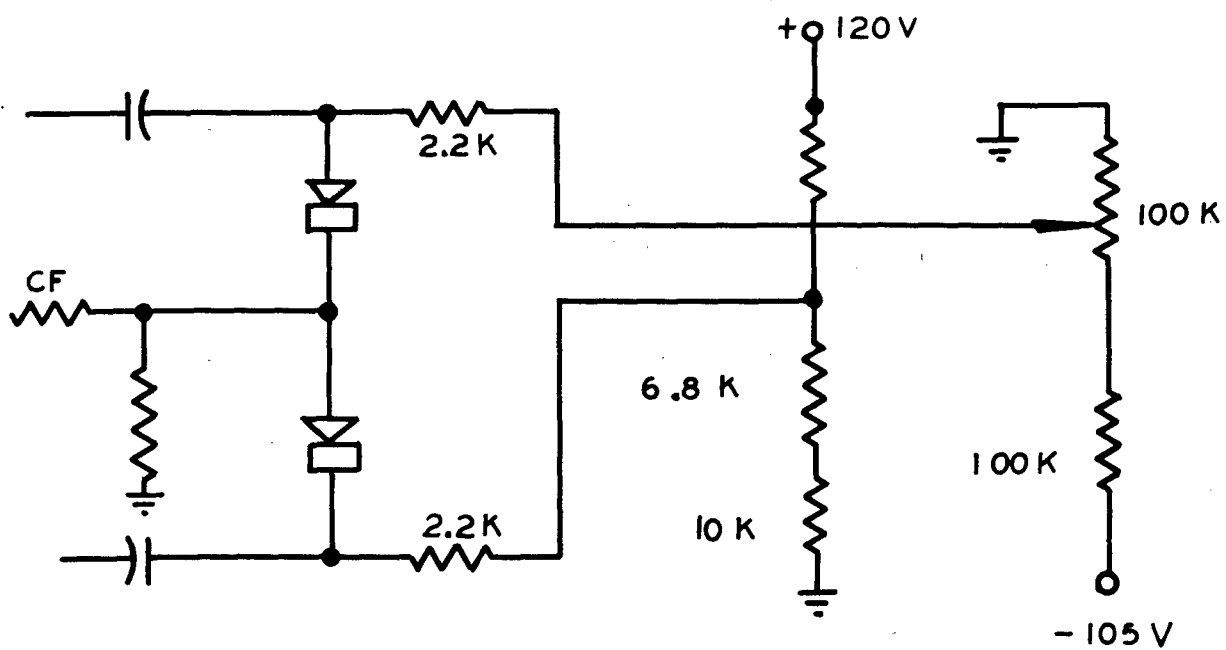

BLEEDER METHOD

FIG. 16


(REFER TO FIGURE TEN)

RESTRICTED

RESTRICTED



A

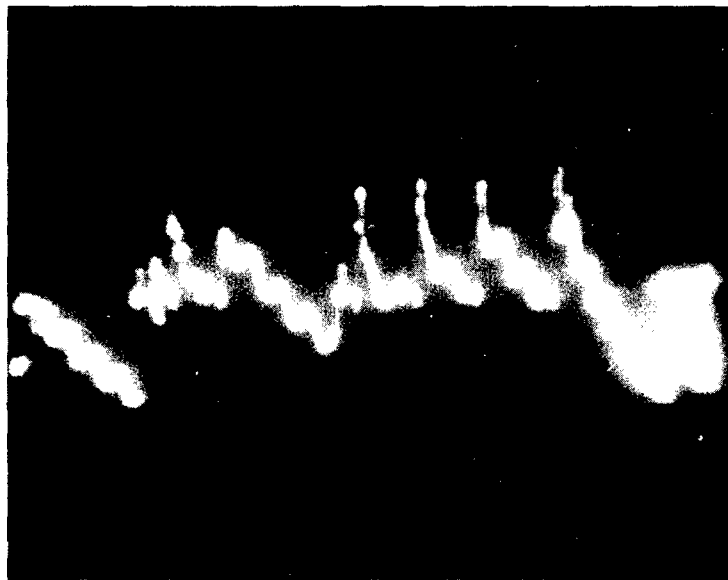

B

FIGURE 17

SINGLE SWEEP OUTPUT OF COINCIDENCE STAGE

Trace A and B

100 Microsec. Sweep

27 MV per inch peak to peak

NOTE: Used the DuMont 248A Scope, Tektronix
Pre Amp #121 and Fairchild Oscillo-
Record Camera.

WADC TR 52-134


21

RESTRICTED

RESTRICTED



A

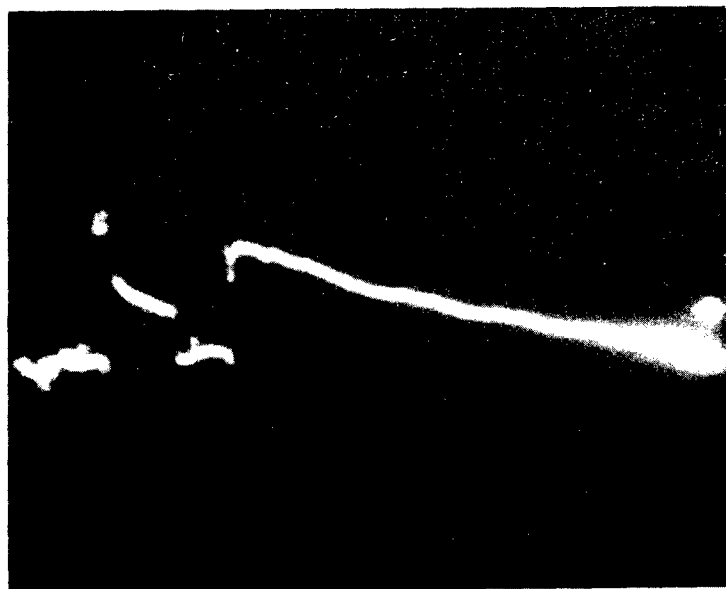

B

FIGURE 18
SINGLE SWEEP OUTPUT OF COINCIDENCE STAGE

Trace A and B
25 Microsec. Sweep
27 MV per inch peak to peak

NOTE: Used the DuMont 248A Scope, Tektronix
Pre Amp #121 and Fairchild Oscillo-
Record Camera.

WADC TR 52-134

22

RESTRICTED

RESTRICTED

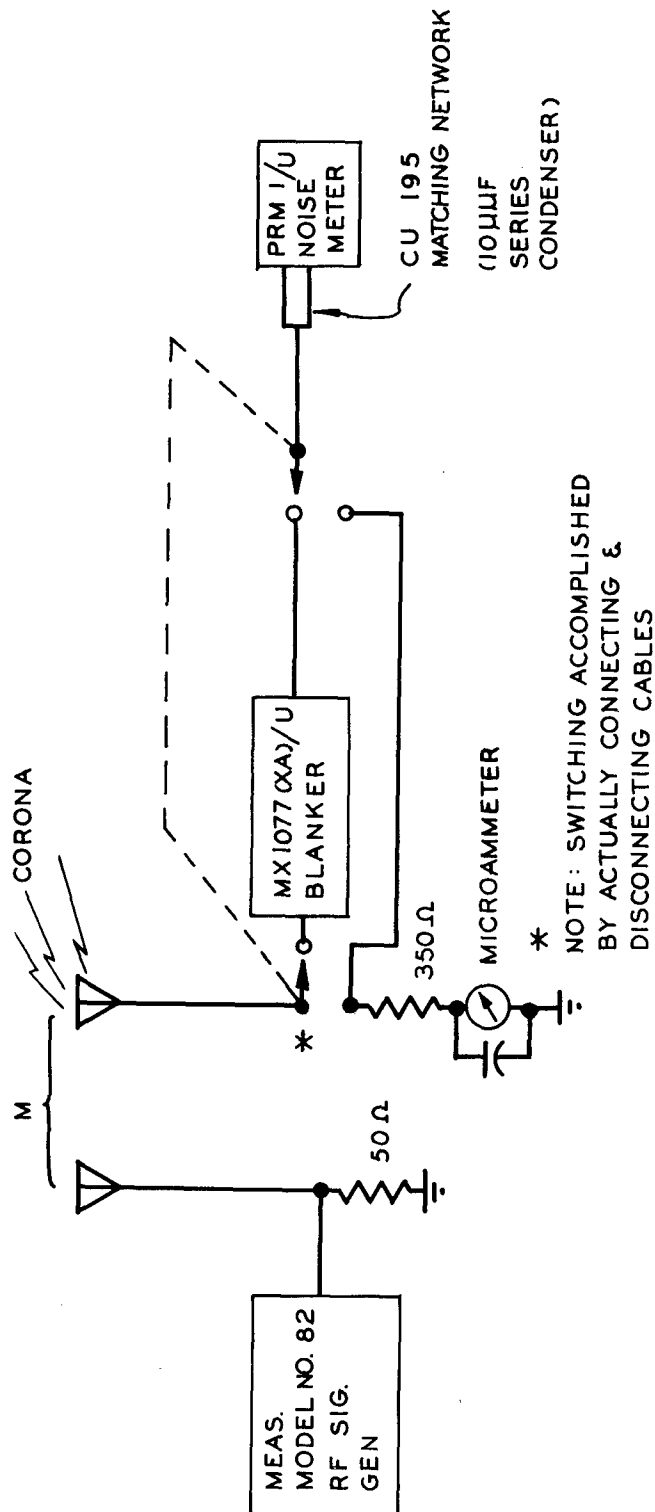


FIGURE 19
DIAGRAM OF TEST SETUP FOR PERFORMANCE TESTS OF
MX 1077 (XA)/U INTERFERENCE BLANKER

RESTRICTED

RESTRICTED

APPENDIX D

OVER-ALL PERFORMANCE

Over-all performance characteristic tests of the blanker were first conducted using Radio Receiver BC-348 with a VTVM connected to the audio output. The tests were conducted in a manner similar to the tests described below. The results thus obtained were misleading due to the dynamotor hum and other receiver noise in the BC-348 which masked the residual noise of the blanker. Consequently, the tests were discarded.


An AN/PRM-1 Noise Meter, Measurements Corp. Signal Generator Model 82, and H-T High Voltage Generator HVG 4 were used in the tests. See Figure 5 for antenna and high voltage corona setup.

The antenna was terminated in its characteristic impedance of about 350 ohms and was fed directly into the noise meter. With all equipments operating, the base noise level was noted. This value varied between one and three microvolts throughout the tests. With the antenna still connected to the noise meter, the voltage of the H-T Generator was brought up until the receiving antenna went into negative corona. This zero signal noise level was noted on the noise meter, and then the r-f signal voltage was applied to the transmitting antenna and its voltage was increased to the point where the signal plus noise voltage was equal to twice the noise voltage. ($S+N=2N$). This r-f signal voltage was arbitrarily called the minimum readable signal voltage. The antenna was then connected to the blanker and the noise meter was connected to the output of the blanker, and the above measurements were repeated with the blanker pulse channel inoperative and operative. The "pulse channel inoperative" tests were made to determine whether any noise improvement or signal degradation was inserted by the blanker delay line and/or video circuits. The "pulse channel operative tests" were made to determine the over-all performance of the blanker. Figure 19 shows the block diagram of the test setup.

These checks were repeated for various values of corona current from zero to 100 microamperes and for several frequencies within the passband of the blanker. The results are shown on the curves of Figures 20, 21, 22, and 23. Figure 20 shows how the minimum readable r-f signal varies with corona current at 245 KC. The solid curve shows the effect of corona on minimum r-f signal when the antenna was fed directly to the noise meter. The dashed curve shows that the blanker video channel has little effect on the minimum r-f signal. The dotted curve was taken with the pulse channel operating and the difference between the solid curve and the dotted curve is a measure of the improvement in the minimum signal due to the blanker. The distance from the solid line down to the 10 microvolt line is the improvement desired. Figure 21 shows the minimum r-f as a function of frequency at 50 milliamperes of corona current.


The curve in Figure 22 shows noise level due to corona alone when the blanker is out of the circuit and when the blanker is in, and operating. The difference between the curves for each frequency is the noise improvement in decibels due to the blanker. The curves are given for the frequency extremes. The noise level represented by the "blanker on" curves consists of the blanking residuals, or

RESTRICTED

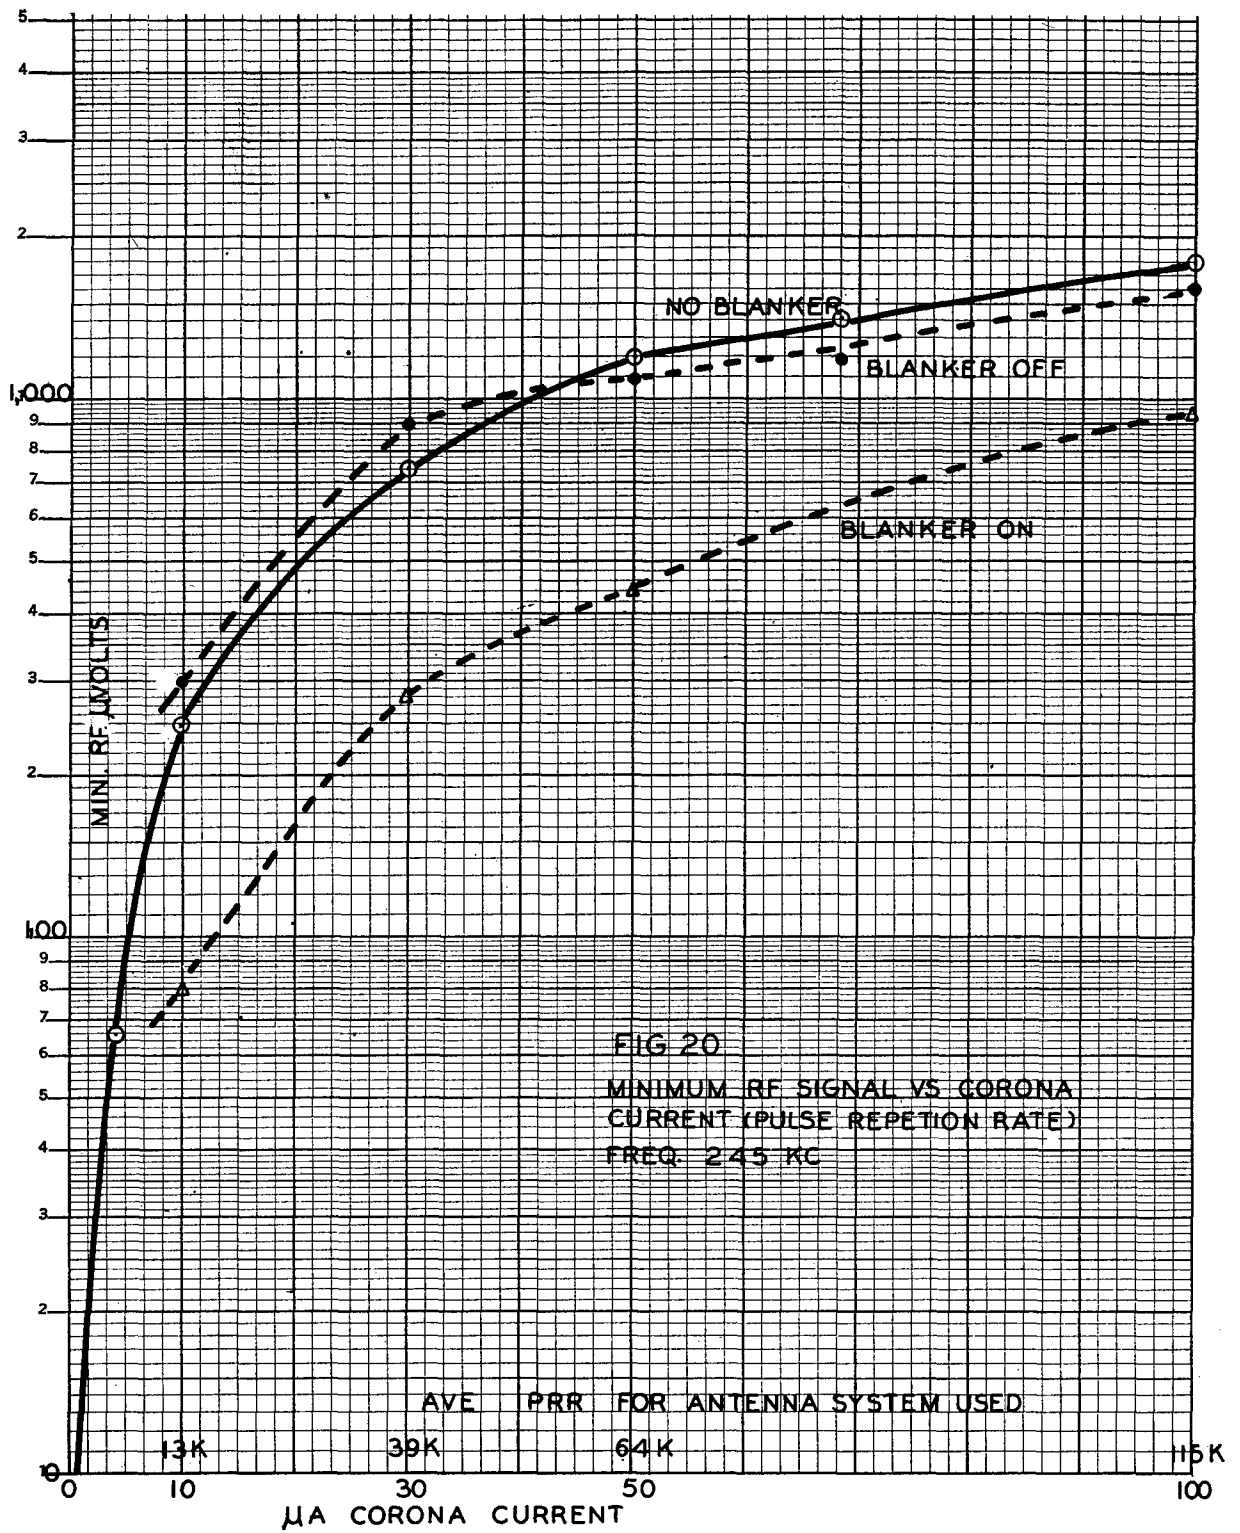


RESTRICTED

RESTRICTED

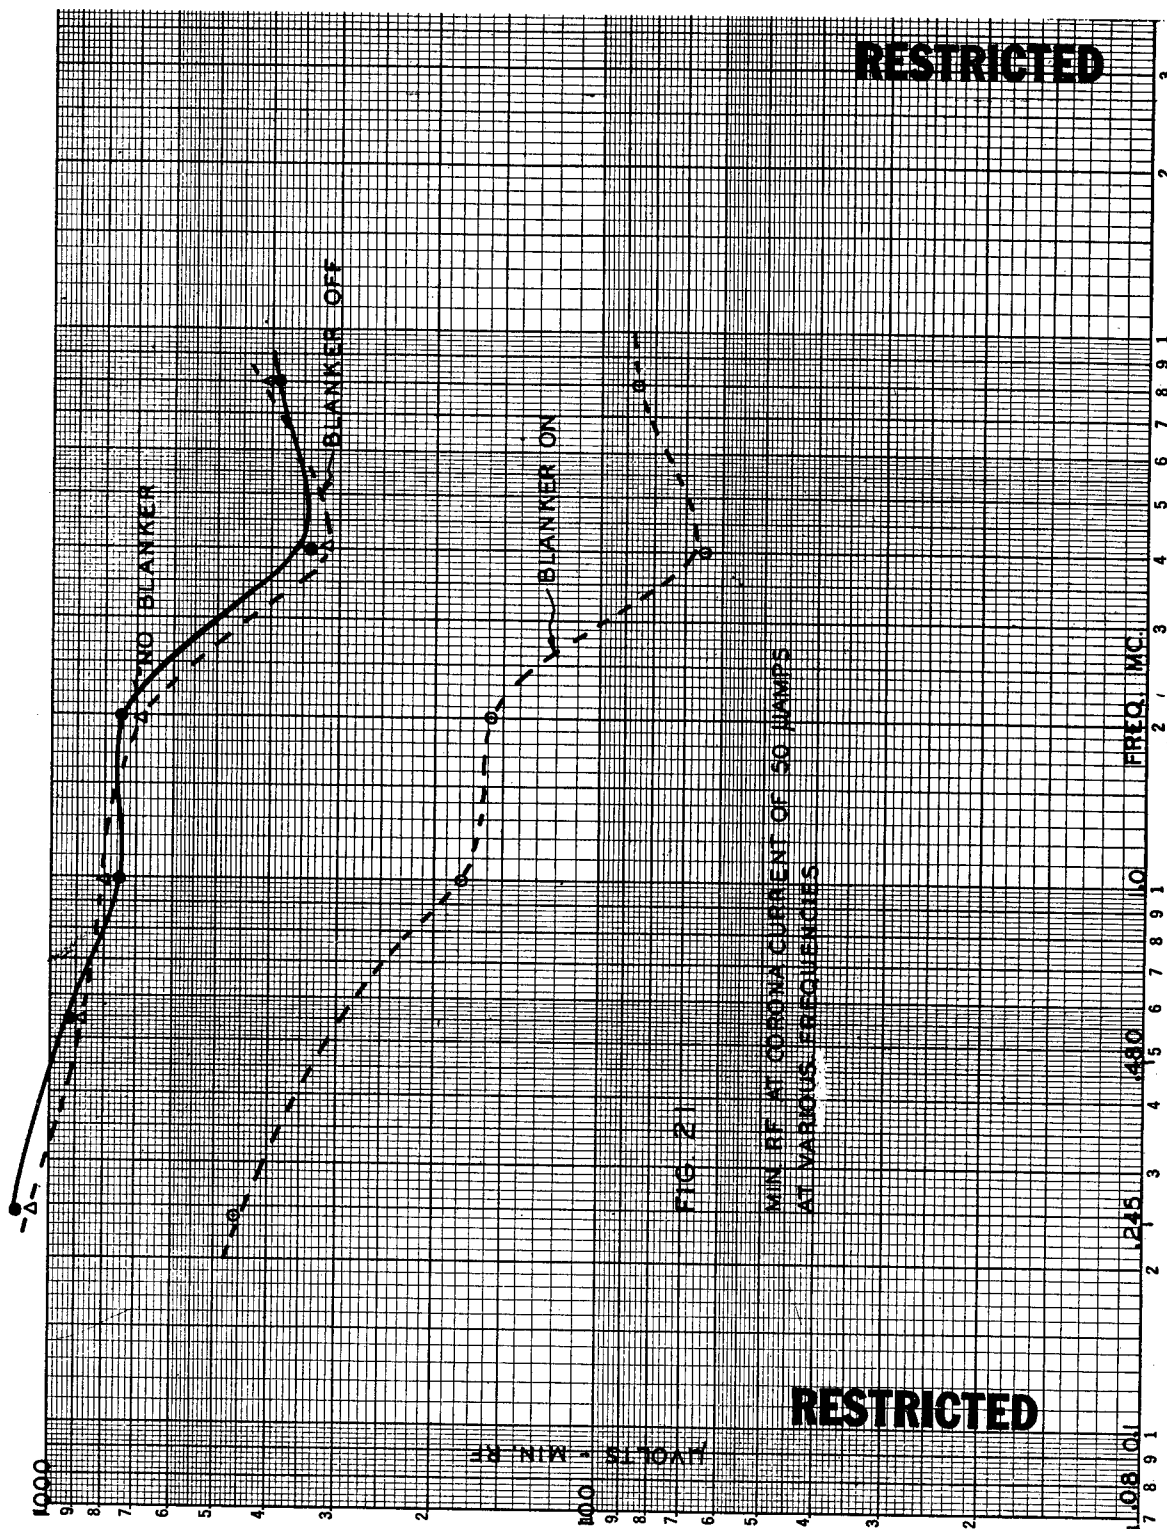


RESTRICTED

RESTRICTED

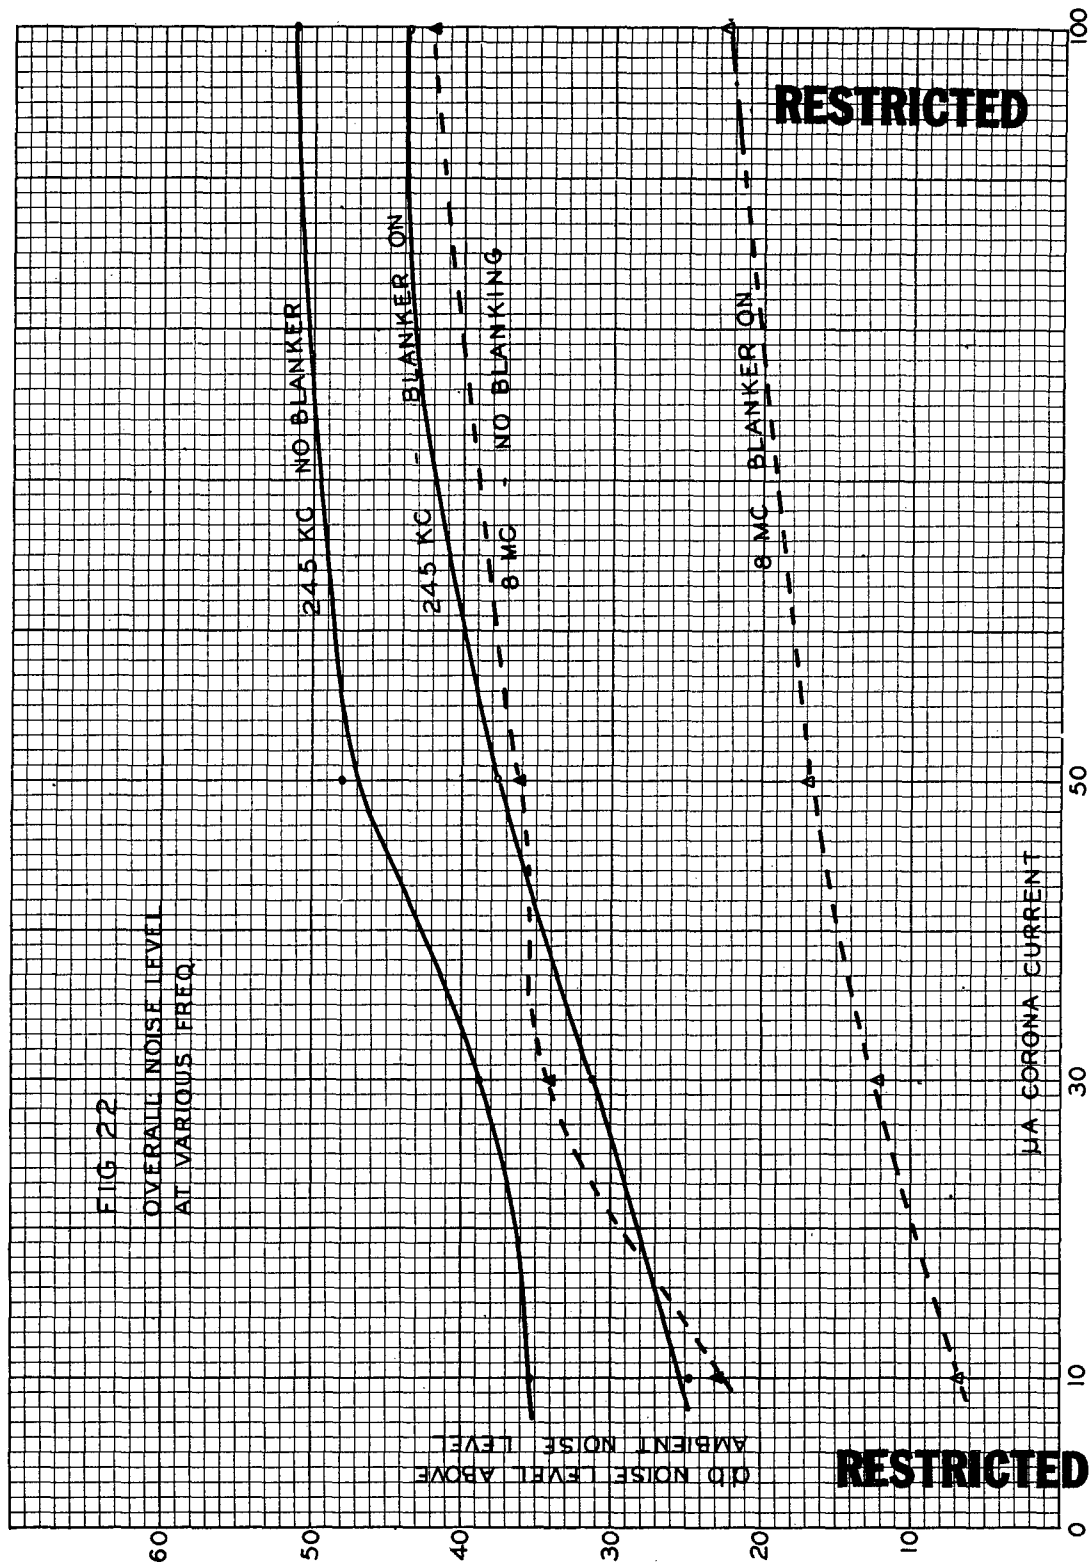

RESTRICTED

RESTRICTED

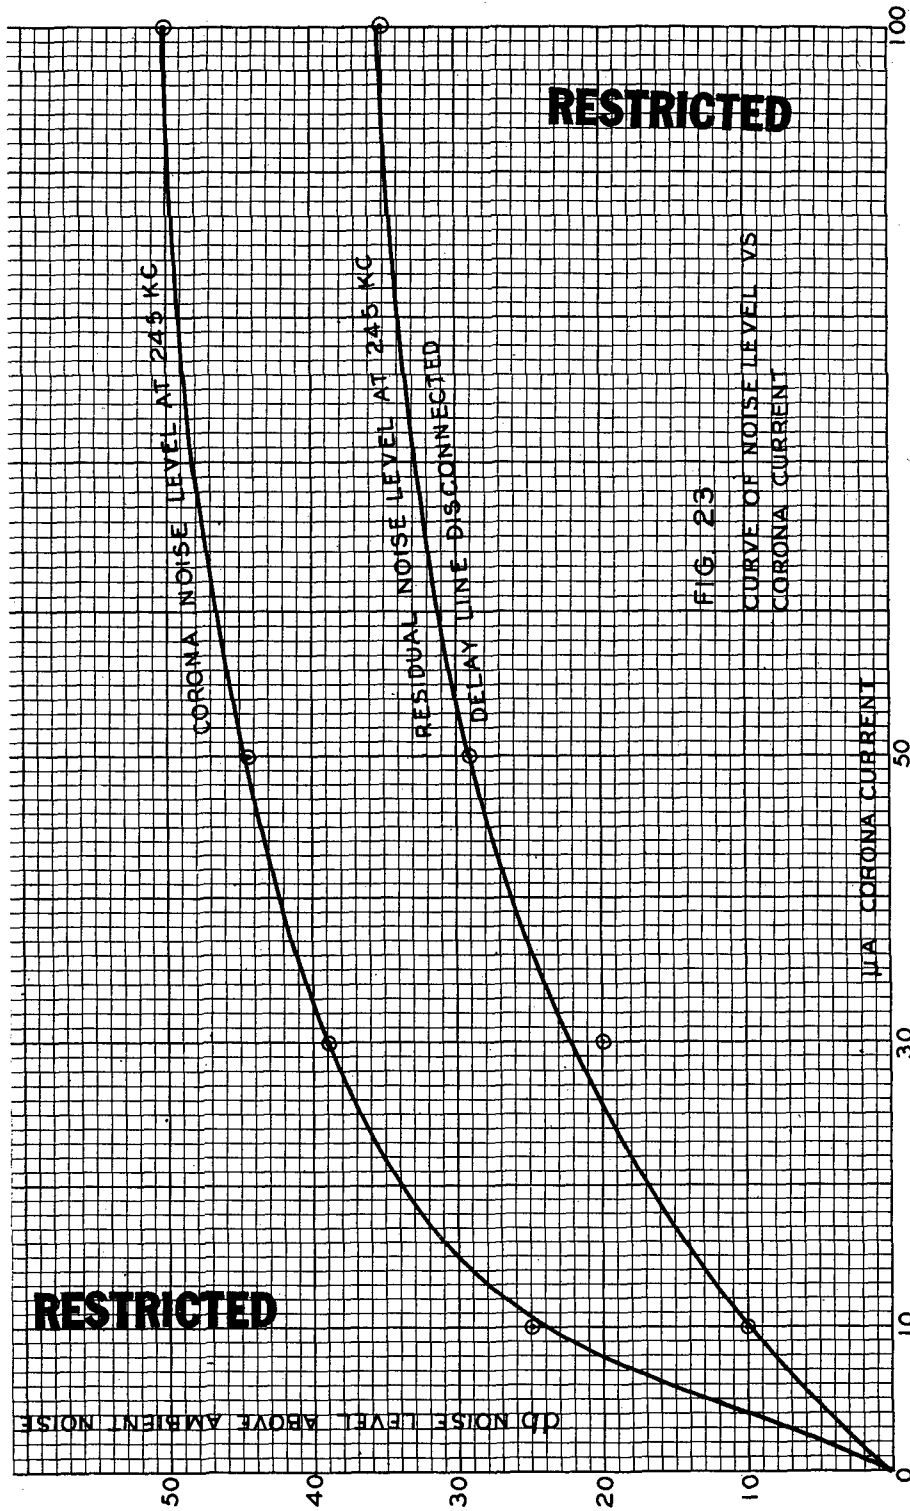

RESTRICTED

~~UNCLASSIFIED~~

switching transients, unblanked corona pulses and partially blanked corona pulses.

The noise due to blanking residuals alone is shown in Figure 23. To determine this curve, the delay line was disconnected to invalidate the signal channel, so that the signal applied to the noise meter consisted only of blanking residuals. The curve was taken at 245 KC, the worst case. This demonstrates that the Polarad Blanker still leaves much room for improvement.

The curves mentioned above also give the average pulse repetition rate for the various values of corona current used. These values were determined as described in the C&N Laboratory Memorandum (AF TR No. 6571) entitled, "Number and Time Distribution Properties of Corona" dated 2 July 1951. Figure 24 shows a chart of corona current versus average pulse repetition rate and the deviations from the average.

FIGURE 24

Ic	AVE PPS	MIN PPS	MAX PPS
10	13000	12000	14000
30	39000	35000	42000
50	64000	58000	69000
100	115000	108000	122000

APPENDIX E

MISCELLANEOUS

The physical over-all size of the blanker is that of a 1/2 ATR unit.

A physical discrepancy of the blanker is that of not standing level of its shock mounts. This can be rectified by mounting the power transformer at the center of balance of the chassis and closer to the bottom of the unit so as to lower the center of gravity to eliminate the top heavy condition.

Microphonics are present to such an extent that the slightest vibration would upset operation of the circuit.

It is recommended that a cooling system such as a blower or a greater use of louvers be used to stabilize the ambient temperature of the unit to a value sufficiently low so as to retard or remedy the drift of the coincidence crystals (which was discussed in the coincidence section) and to increase the working life of the electrical components of the blanker.

The accessibility of pulse channel and/or any of the other channels is relatively good in regard to 1st and 2nd echelon work, but in any work on electrical circuits within each subchassis, patch cables may be needed to increase accessibility thus to increase the scope and efficiency of trouble shooting

~~UNCLASSIFIED~~
UNCLASSIFIED

UNCLASSIFIED

in any of its stages.

A great deficiency is the lack of complete use of JAN approved components.

BIBLIOGRAPHY

Bryant, J. M. and Newman, M. Radio Interference Rejection at the Antenna. Lightning and Transients Research Institute, Minneapolis, Minnesota, December 1946, for Navy Bureau of Aeronautics, Report No. 5, Contract N6ori-230. Task Order One.

Porter, Q. J. Number and Time Distribution Properties of Corona. AF Technical Report No. 6571, Air Research and Development Command, Wright Air Development Center, July 1951.

Storck, H. C. The Reduction of the Effects of Precipitation Static in Circuits Prior to the Input Circuits of Aircraft Radio Receivers. AMC Engineering Memorandum Report MCREE-49-53, 1 February 1950. (Restricted)

Storck, H. C. Improved Circuitry and Components of an Electronic Circuit to Reduce the Effects of Precipitation Static in Radio Receivers. AMC Engineering Memorandum Report MCREE-50-31, 2 June 1950. (Restricted)

Storck, H. C. Interference Blanker MX-(XA-115)/U, For Reducing the Effects of Precipitation Static in Radio Receivers. WADC Technical Report No. 52-65, Air Research and Development Command, Wright Air Development Center, February 1952. (Restricted)

Jaffe, D. L. Interim Engineering Report on Interference Blanker MX-1077(XA)/U Report No. 180-5. Polarad Electronics Corp., 100 Metropolitan Ave, Brooklyn, N.Y. for Wright Air Development Center, Contract No. AF 33(038)-11215, 14 March 1949. (Restricted)

UNCLASSIFIED

DISTRIBUTION LIST FOR WADC TECHNICAL REPORT 52-134

Cys Activities at W-PAFB

2 WCRR (For Rand Corp.)
1 WCAPP
4 BAGR-CD, Mrs. D. Martin
2 DSC-SA
3 WCEOTL
4 WCENT2

Dept. of Defense Activities
Other Than Those at W-PAFBAir Force

1 Director of Research and Development
Headquarters, USAF
Washington 25, D. C.
1 Commanding General
Air Research and Development Command
ATTN: RDOL
P. O. Box 1395
Baltimore 1, Maryland
1 Commanding General
Rome Air Development Center
ATTN: ENR
Griffiss Air Force Base
Rome, New York
1 Commanding General
Air Force Cambridge Research Center
ATTN: ERR
230 Albany Street
Cambridge 39, Massachusetts
1 Washington AF Eng Field Office
Room 4949, Main Navy Bldg.
Department of the Navy
Washington 25, D. C.
1 AF Engineering Field Representative
Code 1110, Naval Res Lab
Washington 25, D. C.
ATTN: Lt Col M. N. Abramovich

Cys Activities

1 Commanding General
Air Proving Ground Command
ATTN: Class. Tech Data Br., D/OI
Eglin Air Force Base, Florida
1 Director
Air University Library (Req. CR-
3998)
Maxwell Air Force Base, Alabama
1 Director of Communications and
Electronics
Air Defense Command
Ent Air Force Base
ATTN: AC&W Coordinating Division
Colorado Springs, Colorado
1 Commanding General
Strategic Air Command
ATTN: Operations Analysis Office
Offutt Air Force Base, Nebraska

Navy

Chief of Naval Research
Department of the Navy
Washington 25, D. C.
6 ATTN: Planning Div., Code N-482
1 ATTN: Elec. Section, Code 427
1 Chief, Bureau of Ordnance
Department of the Navy
ATTN: Code AD-3
Washington 25, D. C.
1 Chief of Naval Operations
Department of the Navy
ATTN: OP-42-B2
Washington 25, D. C.
1 Chief, Bureau of Aeronautics
Department of the Navy
ATTN: Electronic Div., AER-EL-418
Washington 25, D. C.

UNCLASSIFIED

~~RESTRICTED~~

DISTRIBUTION LIST FOR WADC TECHNICAL REPORT 52-134

Cys Activities

- 1 Chief, Bureau of Ships
Department of the Navy
ATTN: Technical Data Section
Washington 25, D. C.

- 1 Director
U. S. Naval Research Laboratory
ATTN: Technical Data Section
Washington 25, D. C.

- 1 OO & Director
U. S. Navy Electronics Laboratory
San Diego 52, California

- 1 Commander
U. S. Naval Ordnance Test Station
Inyokern
China Lake, California

- 1 Superintendent
United States Naval Academy
Post Graduate School
Annapolis, Maryland

- 1 Commander
U. S. Naval Air Development Center
ATTN: Electronics Laboratory
Johnsville, Pennsylvania

- 1 Commander
U. S. Naval Ordnance Laboratory
Silver Spring 19, Maryland

Cys Activities

Army

- 2 Commanding Officer
Signal Corps Eng Laboratory
ATTN: Technical Reports Library
Fort Monmouth, New Jersey

- 1 OCSigO (SIGGD)
Engineering & Technical Division
Washington 25, D. C.

Research and Development Board

- 2 Research and Development Board
Library Br. Info. Offices
ATTN: C. R. Flagg, Rm. 3D1041
The Pentagon
Washington 25, D. C.

Special Projects

- 1 Document Room
Project LINCOLN
Mass. Inst. of Technology
P. O. Box 390
Cambridge 39, Massachusetts
ATTN: Ethel R. Branz

Others

- 1 Polarad Electronic Corporation
100 Metropolitan Avenue
Brooklyn, New York

~~RESTRICTED~~

UNCLASSIFIED